

HIND TILE GROUT

READY TO USE TILE JOINT FILLER



DESCRIPTION

Hind Tile Grout is an ideal cementitious based, ready to use, gap filling material for wall and floor tiles like vitrified, ceramic, mosaic, marble and glazed tiles etc.

USES

Hind Tile Grout is used to filling up the wall and floor joints when tiles like vitrified, ceramic, mosaic, marble and glazed tiles etc. are fixed in residential and industrial buildings. It can be recommended for filling joints width from 1 mm to 4 mm.

ADVANTAGES

- Colour-fast
- Ready to use, only Water/ Polymer (50% Polymer, 50% Water for better result) is to be added.
- Weather Resistant.
- Designed for Interior and Exterior Floor & Wall joints of all types Ceramic Tiles, Vitrified & Semi-Vitrified Tiles, Glass Mosaic tiles, Precast terrazzo and Natural stones.
- It ensures excellent bond with different types of tiles when with Hind Grout Admix Plus (Polymer based Admixture).
- Non-shrinking & Non-cracking.
- Do not use for tile with grout joint larger than 4 mm. Easy application and clean up.

APPLICATION

Surface Preparation

All substrate must be structurally sound, remove spacers and debris in grout joints, clean and free from any contamination like grease, oil, loose particles etc. before application of Hind Tile Grout. Temperature must be between 40°F (4°C) and 90°F (32°C). Apply grout release or sealer if necessary.

Mixing

Use approx. 0.340 - 0.375 Ltr. **Hind Grout Admix Plus** (Polymer based, for better result) / Water to 1 Kg of **Hind Tile Grout** by volume and mixing is to be done properly by a trowel to get a paste type consistency. Place **Hind Grout Admix Plus** in a clean mixing container and add grout powder slowly. Mix by hand or with a slow speed mixer to a smooth stiff consistency. Allow to slake for 5-10 minutes and remix. Allow the Tile grout paste to settle for 10-12 minutes in the mixing pan. The paste is then applied to fill the joints by means of spatula, trowel and finally it is smoothed evenly to level and finish. Surplus grout paste is removed by a damp sponge. Care should be taken while cleaning the surplus grout from getting it pressed down before drying. The tile grout is allowed to dry for hours after application. We must always ensure that tile grout should be filled into the joints, 24 hours after the tile fixing operation is completed.

PROPERTIES

Aspect	Powder
Color	Ivory, white, black, grey, copper brown, cream, blue, green, brick red, sky blue and yellow.
Bulk Density	0.95 Kg / Ltr. at 27°C.
Coverage	1 Kg covers approx. 95-100 Sq.ft (ceramic tiles) and 75-80 Sq.ft (vitrified) for joint size of 3mm width.
Working Time	Approx. 30-45 minutes at 27°C.

HIND TILE GROUT

READY TO USE TILE JOINT FILLER

PACKING

Available in 1 Kg Pack

LIMITATIONS

- Do not use for tile with grout joint larger than 4 mm.
- Do not use where chemical resistance is required.
- Do not use acid to clean joints.
- Do not allow grout to harden on the face of the tile. Clean promptly. Prior to grouting Porus tiles will need to be sealed.
- During cold weather, protect finished work from traffic until fully cured.


SHELF LIFE

Best before 12 months from the date of manufacture. Should be stored in a cool and dry place away from direct sunlight at temperature ranging between 2°C (Min.) and 40°C (Max.).

*High humidity will reduce the shelf life of bagged product.

HANDLING PRECAUTION

Hind Tile Grout is non-toxic and inhalation of the powder material is to be avoided. If contact with eyes occurs was with plenty of water.

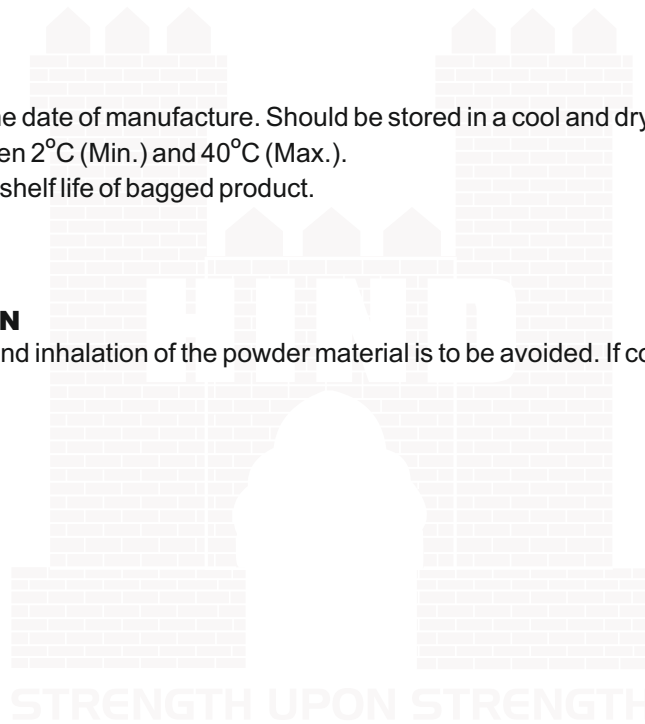

IMPORTANT NOTICE :

Hindcon Chemicals maintains a team of technically trained professionals to provide full support to your problems in construction, and recommend the correct product to suite your specific requirements. Our authorized applicators can attend your site for application of the products. The content of the Technical datasheet are for general information and guideline. The result shown here are generated from our laboratory or from our site experiences.

Quality of our products are maintained as per ISO9001:2008 recommendations and continuous researches. The behaviour can change as per the prevailing conditions at the time of applications. Since **HINDCON CHEMICALS LIMITED** has no control over the use to which the users may put the material, it does not claim or warrant that in the user's particular circumstances, the result that the user will obtain from the product will be the same as those described in this communication or that the user will find the information or recommendations complete, accurate or useful. The client must test and ascertain the safety and fitness for the product for use. The right to change the properties of the products is reserved with us. The proprietary rights of third parties must be observed. All orders are accepted subject to the terms of sale and delivery. Users must always refer to the most recent issue of the latest Data Sheet for the product concerned, copies of which will be supplied on request.



✉ contactus@hindcon.com
☎ +91 33 24490839, 9830599113
☎ +91 33 24490849
📍 Kolkata, West Bengal, India

VISIT OUR WEBSITE

