

HIND ERS 219

HIGH STRENGTH POURABLE EPOXY GROUT.



DESCRIPTION

Hind ERS 219 is a three component solvent free, free flowing, non-shrinking fast curing epoxy resin system which can be poured, in/on concrete, steel plate for carrying out structural repair, grouting of heavy foundation bolt, pocket grouting, padding/heavy duty support for crane, rail and other heavy machineries. The system is insensitive to water and due to higher density it displaces the water thus making application on damp surface. The cured resin system possesses high mechanical strength, non-shrinking properties, excellent adhesion, and is chemical resistant typical of all epoxy resin system. Cracks and voids can be successfully sealed/ bonded with **Hind ERS 219**. Though it has high strength, the cured material does not become brittle and remains slight flexible. **Hind ERS 219** is manufactured in pre-measured quantities. Component A- Resin, Component B Polyamide hardener and Component C- Special Aggregate (Graded Silica flour/sand).

USES

- Free flowing and non-shrink system.
- Resistance to acids and alkalis.
- Moisture insensitive
- Useful and helps rapid installation process with high strength.
- It is used for fixing of bearing plates subjected to heavy load for bridges & piers.

MIX RATIO

Component A - 2 parts by weight: Component B - 1 parts by weight: Component C - 9 parts by weight.

APPLICATION

Preparation of Surface

The area to be treated should be properly cleaned by wire brush or shot blasted.

Mixing

Mix all the Component-B Polyamide Hardener with Component-A Resin. Add Component C Special Aggregate and again mix well, so as not to entrap air into the product. Mix for 2-3 minutes using a drill and paddle (maximum 200-350 R.P.M.). Only required quantity of material to be mixed for immediate use. The mixed material should be kept undisturbed for 2-3 minutes, so that if any entrapped air is there it escapes from the mix.

Cleaning

Clean all tools & equipment immediately after use with, Xylene, Toluene or suitable solvent.

PROPERTIES

Aspect	Comp.A-Liquid, Comp.B-Liquid, Comp.C-Graded Silica
Density	1800 –1900 kg/m ³
Mix Ratio	Comp.A : Comp.B : Comp C = 2:1:9 by weight
Working Time	40-45 minutes at 27°C +2°C
Compressive Strength	Min 50 N/mm ² in 24 hours at 27°C +2°C 75-80 N/mm ² in 7 days at 27°C +2°C
Bond Strength	1.5-2 N/mm ² in 7 days at 27°C +2°C

HIND ERS 219

HIGH STRENGTH POURABLE EPOXY GROUT.

Tensile Strength	12.5-14 N/mm ² in 7 days at 27°C +2°C
Flexural Strength	20-25 N/mm ² in 7 days at 27°C +2°C
Chemical Resistance	Is not affected by wide range of chemicals, oils etc.
Shrinkage	Non-shrink

SHELF LIFE


Best before 12 months from the date of manufacture. Should be stored in a cool and dry place away from direct sunlight at temperature ranging between 2°C (Min.) and 35°C (Max.).

PACKING

12 & 18, Kg. Kit or as required.

HANDLING PRECAUTION

Hind ERS 219 is non-toxic but ingestion is to be avoided. Any splashes to the skin must be washed with water. If contact with eyes occurs, wash well immediately with water and seek medical advice.

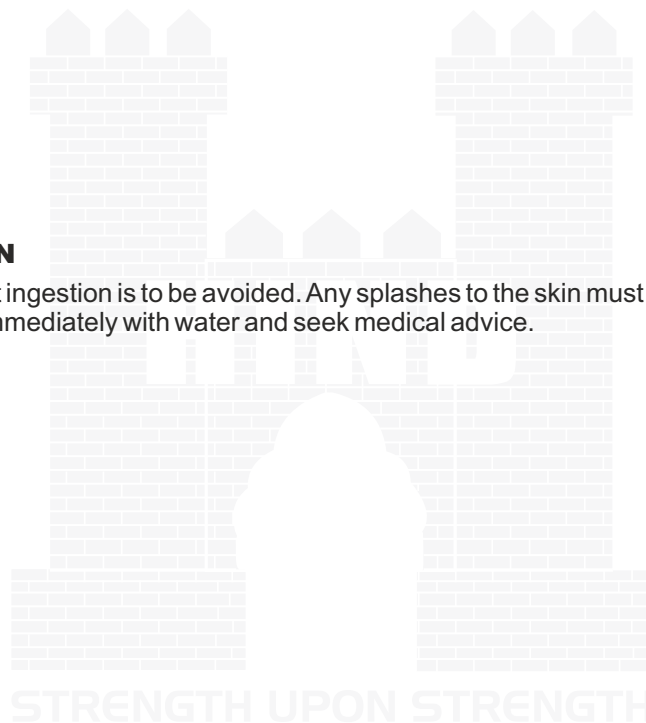

IMPORTANT NOTICE :

Hindcon Chemicals maintains a team of technically trained professionals to provide full support to your problems in construction, and recommend the correct product to suite your specific requirements. Our authorized applicators can attend your site for application of the products. The content of the Technical datasheet are for general information and guideline. The result shown here are generated from our laboratory or from our site experiences.

Quality of our products are maintained as per ISO9001:2008 recommendations and continuous researches. The behaviour can change as per the prevailing conditions at the time of applications. Since **HINDCON CHEMICALS LIMITED** has no control over the use to which the users may put the material, it does not claim or warrant that in the user's particular circumstances, the result that the user will obtain from the product will be the same as those described in this communication or that the user will find the information or recommendations complete, accurate or useful. The client must test and ascertain the safety and fitness for the product for use. The right to change the properties of the products is reserved with us. The proprietary rights of third parties must be observed. All orders are accepted subject to the terms of sale and delivery. Users must always refer to the most recent issue of the latest Data Sheet for the product concerned, copies of which will be supplied on request.



✉ contactus@hindcon.com
☎ +91 33 24490839, 9830599113
☎ +91 33 24490849
📍 Kolkata, West Bengal, India

VISIT OUR WEBSITE

