

HIND ME SEAL

TWO COMPONENT EPOXY PUTTY/SEALANT/ADHESIVE



DESCRIPTION

Hind ME Seal is a two-component epoxy sealant comprising resin and premixed special filler and hardener. The components are pre measured and should be mixed at a time and consumed.

USES

Hind ME Seal is used as sealant for fine cracks in structural members, tile joints, metal joints, down pipe joints on floor slab & walls in Toilets, Kitchen & Rain Water Pipe joints on Roof for complete water tightness.

ADVANTAGES

- Excellent bonding with substrate
- Easy to mix and apply.
- Complete water tightness.
- Hardens after setting and thus not damaged by sharp objects.
- Can be applied without primer also
- Painting can be done over **Hind ME Seal** surface

APPLICATION

Mixing

Entire contents of **Comp-A** and **Comp-B** are to be taken on a clean mixing tray and thoroughly mixed by a metallic spatula.

Surface Preparation

The contact surface between the putty/sealant has to be thoroughly cleaned from all dust, dirt oily or greasy materials and dry. Priming with **Hind ERS 21P** is required for porous substrate and substrates which are subjected to movement. If cracks are filled with Hind Sealant-E it is to be chiselled for making V groove about 10mm -12 mm deep and wide and to be primed with **Hind ERS 21 P** before application of sealant. After the sealant is applied it is to be tooled with a sharp knife.

PROPERTIES

Aspect	Comp A-Semi Solid Paste, Comp.B –Semi Solid Paste
Colour	Off white (Mixed material)
Density	1350 – 1400 Kg/m ³ (Mixed material)
Mixing Ratio	Pack A (Resin) : Pack B (Hardener) :: 1:1
Working Time	40-45 minutes at 27°C \pm 2°C
Compressive Strength Min	30 N/mm ² \pm 2N/mm ² in 24 hours at 27°C \pm 2°C 70 N/mm ² \pm 5 N/mm ² in 7 days at 27°C \pm 2°C
Bond Strength	1.5 to 2 N/mm ² in 7 days at 27°C \pm 2°C
Tensile Strength	14-17.5 N/mm ² in 7 days at 27°C \pm 2°C
Flexural Strength	25-35 N/mm ² in 7 days at 27°C \pm 2°C
Chemical Resistance	Is not affected by wide range of chemicals, oils etc.
Shrinkage	Non-shrink

HIND ME SEAL

TWO COMPONENT EPOXY PUTTY/SEALANT/ADHESIVE

SHELF LIFE

Best before 12 months from the date of manufacture. Should be stored in a cool and dry place away from direct sunlight at temperature ranging between 2°C (Min.) and 35°C (Max.).

PACKING

1 & 2 Kg Packing (Comp A & B)

HANDLING PRECAUTION


Hind ME Seal is non-toxic. Any splashes to the skin or eyes must be washed with clean water immediately.



IMPORTANT NOTICE :

Hindcon Chemicals maintains a team of technically trained professionals to provide full support to your problems in construction, and recommend the correct product to suite your specific requirements. Our authorized applicators can attend your site for application of the products. The content of the Technical datasheet are for general information and guideline. The result shown here are generated from our laboratory or from our site experiences.

Quality of our products are maintained as per ISO9001:2008 recommendations and continuous researches. The behaviour can change as per the prevailing conditions at the time of applications. Since **HINDCON CHEMICALS LIMITED** has no control over the use to which the users may put the material, it does not claim or warrant that in the user's particular circumstances, the result that the user will obtain from the product will be the same as those described in this communication or that the user will find the information or recommendations complete, accurate or useful. The client must test and ascertain the safety and fitness for the product for use. The right to change the properties of the products is reserved with us. The proprietary rights of third parties must be observed. All orders are accepted subject to the terms of sale and delivery. Users must always refer to the most recent issue of the latest Data Sheet for the product concerned, copies of which will be supplied on request.

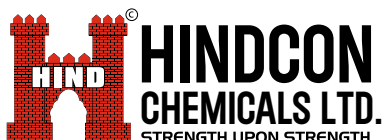

✉ contactus@hindcon.com
☎ +91 33 24490839, 9830599113
☎ +91 33 24490849
📍 Kolkata, West Bengal, India

VISIT OUR WEBSITE

